


Patio Door




Your one-stop broker

for high-quality vinyl windows and doors

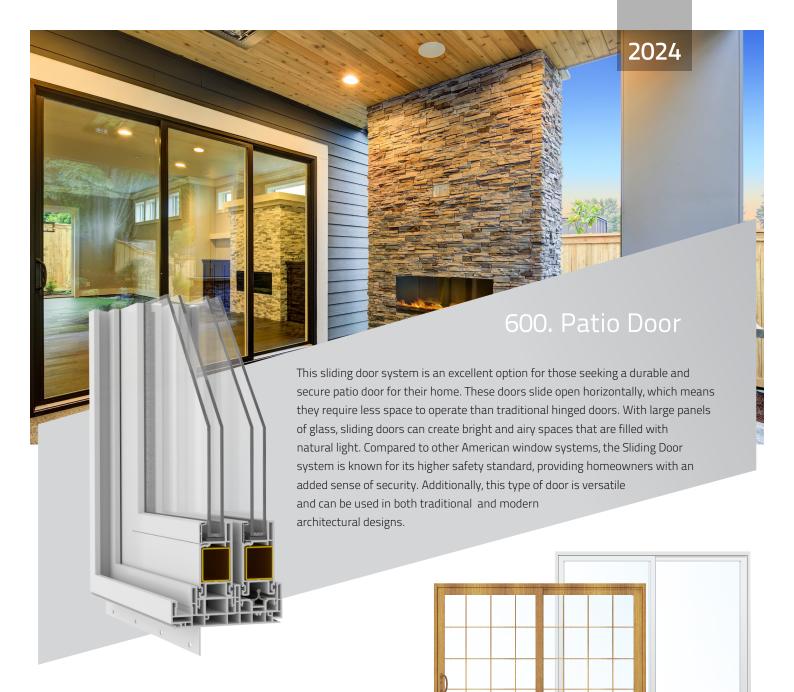

Main technical parameters of the Patio Door System:

- Depth of frame: 5 ¹/₅"
- Exteriorly glazed sash
- Rigid steel reinforcement of sashes, 1,5 mm thick
- Specially designed chamber for a sliding mosquito net
- Triple weatherseal at interlock
- Integral nailing fin for new-construction applications



Grill paterns









Prairie


None Colonial

Types of glass:

GLAZING OPTIONS	Compare U-factors and SHGC values			Glazing proposals			
	3/4" Low-E	0.31	SHGC 0.43	4mm XN - 12mm Arg90 - 4mm Clr			
LOW-E	One lite of Low-E with argon						
LOW-E	3/4" Low-E ONE	0.31	SHGC 0.35	4mm Planitherm One II - 12mm Arg90 - 4mmClr			
	One lite of Low-E ONE with argon						
	3/4" Low-E double	0.31	SHGC 0.42	4mm CG Prem2 UC4 - 12mm Arg90 - 4mmCG Prem2 UC4			
DOUBLE LOW E	Two lites of Low-E ONE with argon						
DOUBLE LOW-E	3/4" Low-E ONE+	0.31	SHGC 0.30	4mm CG 1.0+ - 12mm Arg90 - 4mm CG 1.0+			
	Two lites of Low-E ONE+ with argon						
	3/4" Cool-lite SKN	0.30	SHGC 0.20	4mm CL SKN 154 - 12mm Arg90 - 4mm Clr			
	One lite of solar cooling Low-E						
SELECTIVE	3/4" SunGard70/35	0.31	SHGC 0.25	4mm SG SN 70/35 - 12mm Arg90 - 4mm Clr			
	One lite of solar cooling Low-E						

LOW-E	
DOUBLE LOW-E	

	Product Type	Series	Test Unit Size (inches)	Overall Rating	Air Inflitration (cfm/ft ₂)	Water Pressure (psf)	Structural Pressure (psf)	Primary Product Designator
	PATIO DOOR	NC.600	90 X 90	LC - PG25	0,09	4,59	+25/-25	A440-17
		RP.600	90 X 90	LC - PG25	0,09	4,59	+25/-25	A440-17



Laminate colors















Mahogany

White

Walunt V

Colors shown may not be accurate representations. For color matching, please request color samples from our sales representative

Golden Oak

 $\mathsf{Silver}\,\mathsf{V}$

Brown 8972

Black

Anthracite Grey

Trompet C-32 N Smooth

Color options

Mosquito net colors











Additional profiles

4481



J-Channel is designed specifically for trimming out openings on your wall panels. Windows, doors, and louvers on the walls of your building blend in seamlessly when J-Channel is installed. J-Channel hides the cut lines of panels

4482




Frame 5/8" Flange Profile installed on the exterior sides of a window

4483


Frame Flush Flange Flush-flange window frames are appropriate for any kind of cladding that produces a flat surface. It gives a finished look to a window installation

4484




Stucco key is explicitly designed for new construction homes using stucco. Stucco key features help finish stucco around a window, providing a consistent finishing point. It covers the gap that can result from stucco's

4485




Brick mold gives a finished look to a window installation surrounded by brick.

4486




Mullion cap is designed for mulling two separate window frames together to create a large window.

4488



Head Cover. Also known as a head expander, it is used in replacement window applications where the replacement window is slightly shorter than the existing frame. The head expander can be insulated and covers the gap between the head of the window and the frame, making installation hassle-free.

4489



Jamb Extension. Window jamb extension is an interior window component (in varying depths) that allows the window frame to fit the window opening.







