




**YOUR**  
**WINDOWS**  
www.yourwindows.com

# Awning

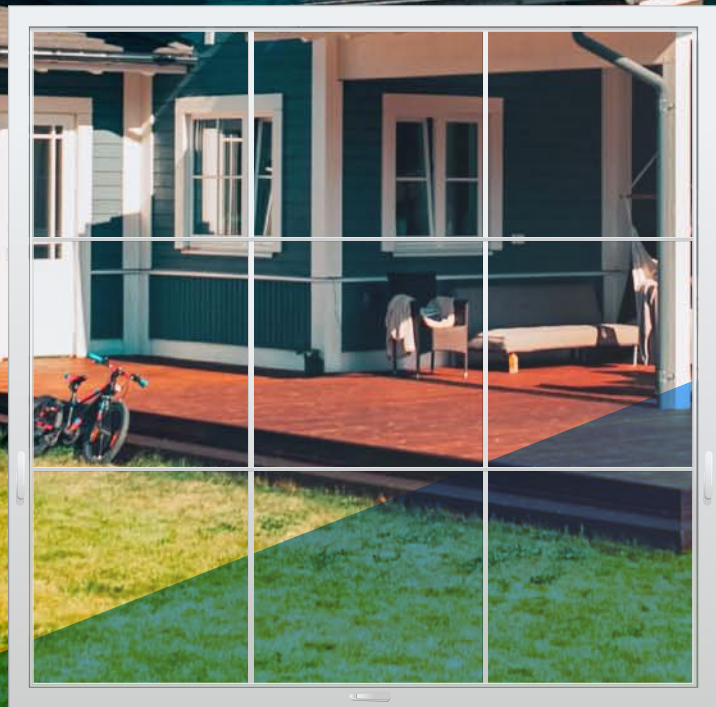


**Your one-stop broker**  
for high-quality vinyl windows and doors



## NC.300. Awning


Awning windows are hinged at the top and open outward from the bottom, creating a sloping „awning” effect when they’re open. This design allows for ventilation while also protecting from rain or other elements that might enter through an open window. Awning windows are often used in bathrooms, kitchens, and other areas where privacy and ventilation are essential. They are typically operated using a crank mechanism or a push-out lever, allowing the user to easily open and close the window to the desired position.

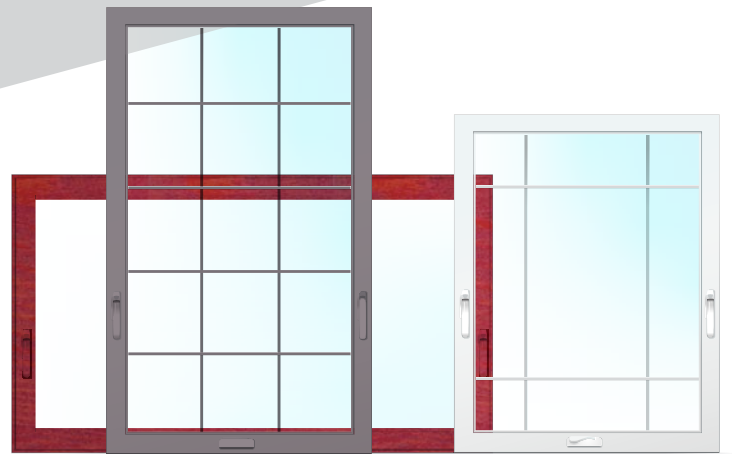


### Main technical parameters of the Awning System:

- Depth of frame: 3 1/4"
- Glazing thickness range: up to 3/4"
- Opens and closes with a special crank and a single handle
- Exteriorly glazed sash Integral accessory grooves
- Excellent triple sealing Integral nailing fin for new-construction applications
- Available without integral nailing fin for replacement window applications


### Grill patterns



None



Colonial




Prairie


## Types of glass:

GLAZING OPTIONS	Compare U-factors and SHGC values		Glazing proposals	
LOW-E	3/4" Low-E	0.27	SHGC 0.38	4mm XN - 12mm Arg90 - 4mm Clr
	One lite of Low-E with argon			
	3/4" Low-E ONE	0.27	SHGC 0.31	4mm Planitherm One II - 12mm Arg90 - 4mm Clr
	One lite of Low-E ONE with argon			
DOUBLE LOW-E	3/4" Low-E double	0.27	SHGC 0.37	4mm CG Prem2 UC4 - 12mm Arg90 - 4mmCG Prem2 UC4
	Two lites of Low-E ONE with argon			
	3/4" Low-E ONE+	0.27	SHGC 0.31	4mm CG 1.0+ - 12mm Arg90 - 4mm CG 1.0+
	Two lites of Low-E ONE+ with argon			
SELECTIVE	3/4" Cool-lite SKN	0.27	SHGC 0.18	4mm CL SKN 154 - 12mm Arg90 - 4mm Clr
	One lite of solar cooling Low-E			
	3/4" SunGard70/35	0.29	SHGC 0.22	4mm SG SN 70/35 - 12mm Arg90 - 4mm Clr
	One lite of solar cooling Low-E			


LOW-E




DOUBLE LOW-E



SELECTIVE



Product Type	Series	Test Unit Size (inches)	Overall Rating	Air Infiltration (cfm/ft.)	Water Pressure (psf)	Structural Pressure (psf)	Primary Product Designator
AWNING	NC.400	50,2 X 35,4	LC - PG25	0,02	9,82	+25/-25	A440-22
	RP.400	50,2 X 35,4	LC - PG25	0,02	9,82	+25/-25	A440-22



■ Northern ■ North-Central ■ South-Central ■ Southern


## Laminate colors




Mahogany




Walnut V



Golden Oak



Silver V



Brown 8972



Black



Anthracite Grey



Trompet C-32 N Smooth

## Color options



White

## Mosquito net colors



White



Black

## Hardware color options



White




Black

Colors shown may not be accurate representations.  
For color matching, please request color samples from our sales representative




## Additional profiles

4481




J-Channel is designed specifically for trimming out openings on your wall panels. Windows, doors, and louvers on the walls of your building blend in seamlessly when J-Channel is installed. J-Channel hides the cut lines of panels

4482




Frame 5/8" Flange  
Profile installed on the exterior sides of a window

4483

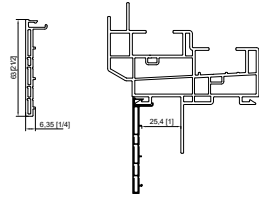


Frame Flush Flange  
Flush-flange window frames are appropriate for any kind of cladding that produces a flat surface. It gives a finished look to a window installation

4484




Stucco key is explicitly designed for new construction homes using stucco. Stucco key features help finish stucco around a window, providing a consistent finishing point. It covers the gap that can result from stucco's

4485




Brick mold gives a finished look to a window installation surrounded by brick.

4486




Mullion cap is designed for mulling two separate window frames together to create a large window.

4488



Head Cover. Also known as a head expander, it is used in replacement window applications where the replacement window is slightly shorter than the existing frame. The head expander can be insulated and covers the gap between the head of the window and the frame, making installation hassle-free.

4489



Jamb Extension.  
Jamb extensions are installed along the interior edge of window and patio door frames, providing a smooth transition to the interior trim or casing



**YOUR  
WINDOWS**  
www.yourwindows.com