




**YOUR**  
**WINDOWS**  
www.yourwindows.com

# Double-Hung

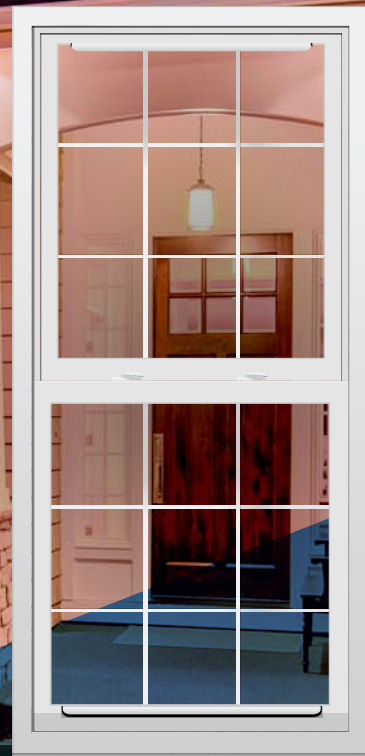

**Your one-stop broker**  
for high-quality vinyl windows and doors




## NC.200. Double-Hung

The Double-Hung window is a highly popular type of window in the United States. This window features two independent sashes that can be lifted from the bottom or lowered from the top. It is designed for ease of use and cleaning, with both sashes tilting inward to provide simple access to the interior and exterior panes of glazing. The Double-Hung window is an efficient use of space, as it does not require any extra room to operate, making it an ideal choice for maximizing both interior and exterior space.

### Main technical parameters of the Double-Hung System:

- Depth of frame: 3 1/4"
- Glazing thickness range: up to 3/4"
- Exterior glazed sash
- Triple weather seal at interlock
- Double weather seal on the sides and upper parts of the window frame
- Handle integrated with a sash
- Sloped sill for better drainage of water

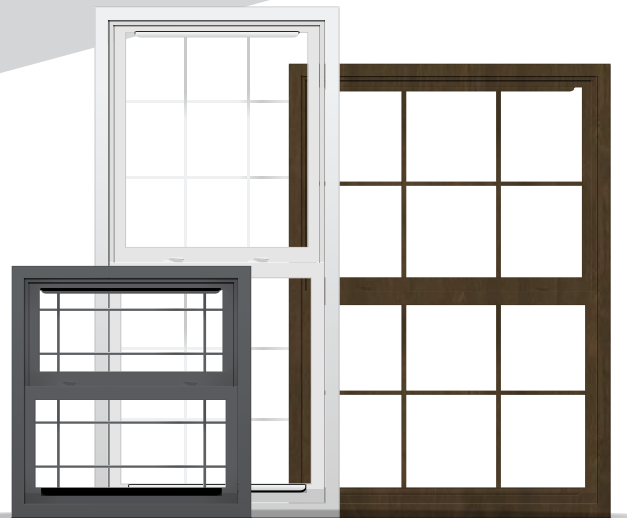

- Firm sill leg and screen chamber that prevents warping and rippling
- Integral accessory grooves


### Grill patterns



None



Colonial




Prairie




## Types of glass:

GLAZING OPTIONS	Compare U-factors and SHGC values			Glazing proposals
	U-factor	SHGC	U-factor	
LOW-E	3/4" Low-E	0.29	SHGC 0.44	4mm XN - 12mm Arg90 - 4mm Clr
	One lite of Low-E with argon			
	3/4" Low-E ONE	0.29	SHGC 0.35	„4mm Planitherm One II - 12mm Arg90 - 4mmClr“
DOUBLE LOW-E	One lite of Low-E ONE with argon			
	3/4" Low-E double	0.28	SHGC 0.42	„4mm CG Prem2 UC4 - 12mm Arg90 - 4mmCG Prem2 UC4“
	Two lites of Low-E ONE with argon			
	3/4" Low-E ONE+	0.28	SHGC 0.30	4mm CG 1.0+ - 12mm Arg90 - 4mm CG 1.0+
SELECTIVE	Two lites of Low-E ONE+ with argon			
	3/4" Cool-lite SKN	0.28	SHGC 0.20	4mm CL SKN 154 - 12mm Arg90 - 4mm Clr
	One lite of solar cooling Low-E			
	3/4" SunGard70/35	0.29	SHGC 0.25	4mm SG SN 70/35 - 12mm Arg90 - 4mm Clr
One lite of solar cooling Low-E				


LOW-E



DOUBLE LOW-E




SELECTIVE



Product Type	Series	Test Unit Size (inches)	Overall Rating	Air Infiltration (cfm/ft.)	Water Pressure (psf)	Structural Pressure (psf)	Primary Product Designator
DOUBLE-HUNG	NC.200	44 X 72	LC - PG40	0,1	6,06	+40/-40	A440-22
	NC.200	44 X 72	R-PG40	0,1	6,06	+40/-40	A440-17
	RP.200	44 X 72	LC - PG40	0,1	6,06	+40/-40	A440-22
	RP.200	44 X 72	R-PG40	0,1	6,06	+40/-40	A440-17

## Hung Picture Window

Product Type	Series	Test Unit Size (inches)	Overall Rating	Air Infiltration (cfm/ft.)	Water Pressure (psf)	Structural Pressure (psf)	Primary Product Designator
HUNG PICTURE WINDOW	NC.250	60 X 60	CW - PG50	0,01	9,82	+50/-50	A440-22
	RP.250	60 X 60	CW - PG50	0,01	9,82	+50/-50	A440-22



■ Northern ■ North-Central ■ South-Central ■ Southern


## Laminate colors




Mahogany



Walnut V



Golden Oak



Silver V



Brown 8972



Black



Anthracite Grey



Trompet C-32 N Smooth

## Color options




White



White



Black



White



Black

## Mosquito net colors


## Hardware color options

Colors shown may not be accurate representations. For color matching, please request color samples from our sales representative




## Additional profiles

**4481**




J-Channel is designed specifically for trimming out openings on your wall panels. Windows, doors, and louvers on the walls of your building blend in seamlessly when J-Channel is installed. J-Channel hides the cut lines of panels

**4482**




Frame 5/8" Flange  
Profile installed on the exterior sides of a window

**4483**




Frame Flush Flange  
Flush-flange window frames are appropriate for any kind of cladding that produces a flat surface. It gives a finished look to a window installation

**4484**

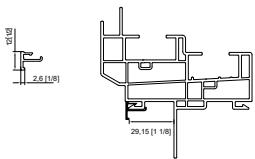


Stucco key is explicitly designed for new construction homes using stucco. Stucco key features help finish stucco around a window, providing a consistent finishing point. It covers the gap that can result from stucco's

**4485**




Brick mold gives a finished look to a window installation surrounded by brick.

**4486**




Mullion cap is designed for mulling two separate window frames together to create a large window.

**4488**



Head Cover. Also known as a head expander, it is used in replacement window applications where the replacement window is slightly shorter than the existing frame. The head expander can be insulated and covers the gap between the head of the window and the frame, making installation hassle-free.

**4489**



Jamb Extension.  
Jamb extensions are installed along the interior edge of window and patio door frames, providing a smooth transition to the interior trim or casing



**YOUR  
WINDOWS**  
www.yourwindows.com