





YOUR
WINDOWS
www.yourwindows.com

Patio Door

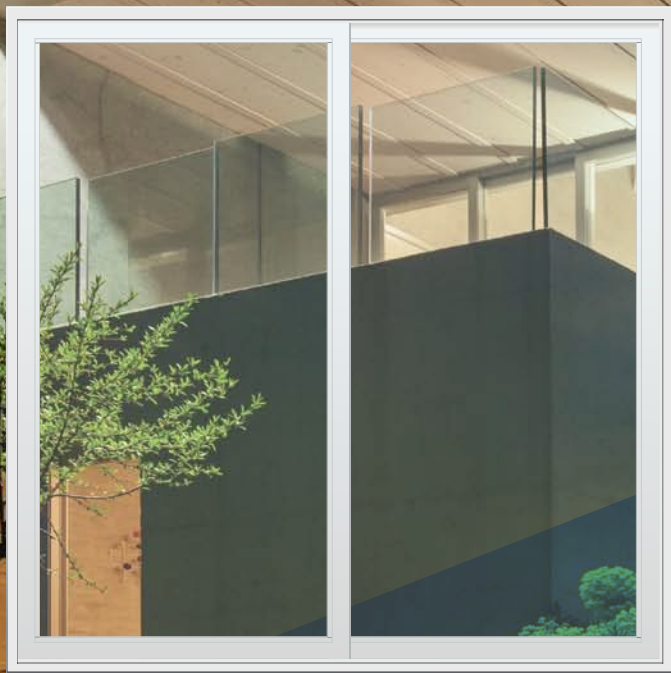


Your one-stop broker
for high-quality vinyl windows and doors

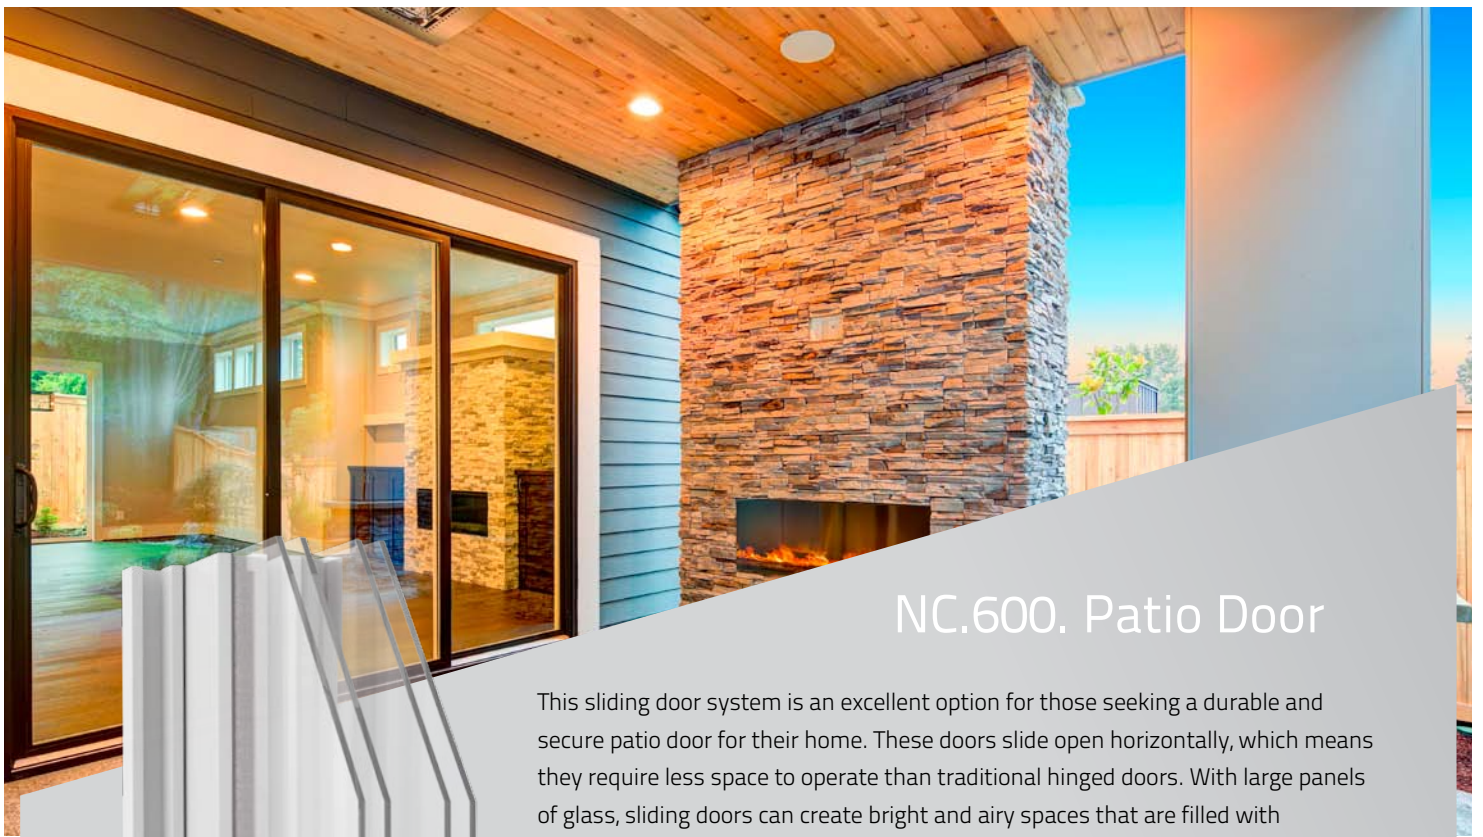

NC.600. Patio Door

This sliding door system is an excellent option for those seeking a durable and secure patio door for their home. These doors slide open horizontally, which means they require less space to operate than traditional hinged doors. With large panels of glass, sliding doors can create bright and airy spaces that are filled with natural light. Compared to other American window systems, the Sliding Door system is known for its higher safety standard, providing homeowners with an added sense of security. Additionally, this type of door is versatile and can be used in both traditional and modern architectural designs.

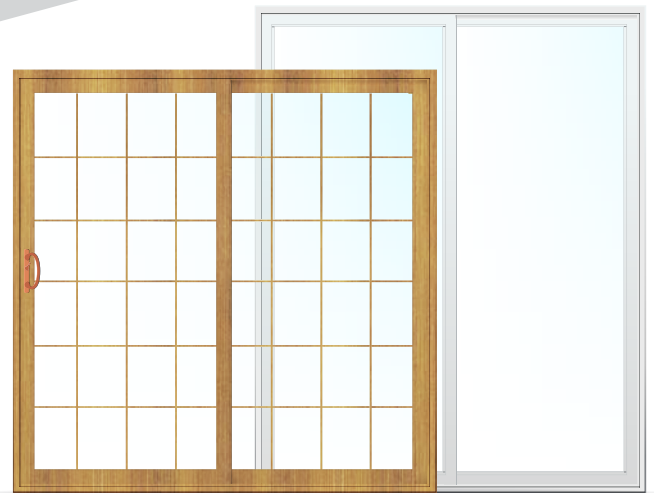


Main technical parameters of the Patio Door System:

- Depth of frame: 5 1/5"
 - Exteriorly glazed sash
 - Rigid steel reinforcement of sashes, 1,5 mm thick
 - Specially designed chamber for a sliding mosquito net
 - Triple weatherseal at interlock
 - Integral nailing fin for new-construction applications
- Available without integral nailing fin for replacement window applications.



Grill patterns



None



Colonial




Prairie


Types of glass:

GLAZING OPTIONS	Compare U-factors and SHGC values			Glazing proposals
	U-factor	SHGC	U-factor	
LOW-E	3/4" Low-E	0.31	SHGC 0.43	4mm XN - 12mm Arg90 - 4mm Clr
	One lite of Low-E with argon			
	3/4" Low-E ONE	0.31	SHGC 0.35	4mm Planitherm One II - 12mm Arg90 - 4mm Clr
DOUBLE LOW-E	One lite of Low-E ONE with argon			
	3/4" Low-E double	0.31	SHGC 0.42	4mm CG Prem2 UC4 - 12mm Arg90 - 4mmCG Prem2 UC4
	Two lites of Low-E ONE with argon			
	3/4" Low-E ONE+	0.31	SHGC 0.30	4mm CG 1.0+ - 12mm Arg90 - 4mm CG 1.0+
SELECTIVE	Two lites of Low-E ONE+ with argon			
	3/4" Cool-lite SKN	0.30	SHGC 0.20	4mm CL SKN 154 - 12mm Arg90 - 4mm Clr
	One lite of solar cooling Low-E			
	3/4" SunGard70/35	0.31	SHGC 0.25	4mm SG SN 70/35 - 12mm Arg90 - 4mm Clr
One lite of solar cooling Low-E				

LOW-E




DOUBLE LOW-E



SELECTIVE



Product Type	Series	Test Unit Size (inches)	Overall Rating	Air Infiltration (cfm/ft.)	Water Pressure (psf)	Structural Pressure (psf)	Primary Product Designator
PATIO DOOR	NC.600	90 X 90	LC - PG25	0,09	4,59	+25/-25	A440-17
	RP.600	90 X 90	LC - PG25	0,09	4,59	+25/-25	A440-17



■ Northern ■ North-Central ■ South-Central ■ Southern


Laminate colors




Mahogany




Walnut V



Golden Oak



Silver V



Brown 8972



Black



Anthracite Grey




Trompet C-32 N Smooth

Color options



White



White



Black

Mosquito net colors

Hardware color options





White




Black

Colors shown may not be accurate representations. For color matching, please request color samples from our sales representative

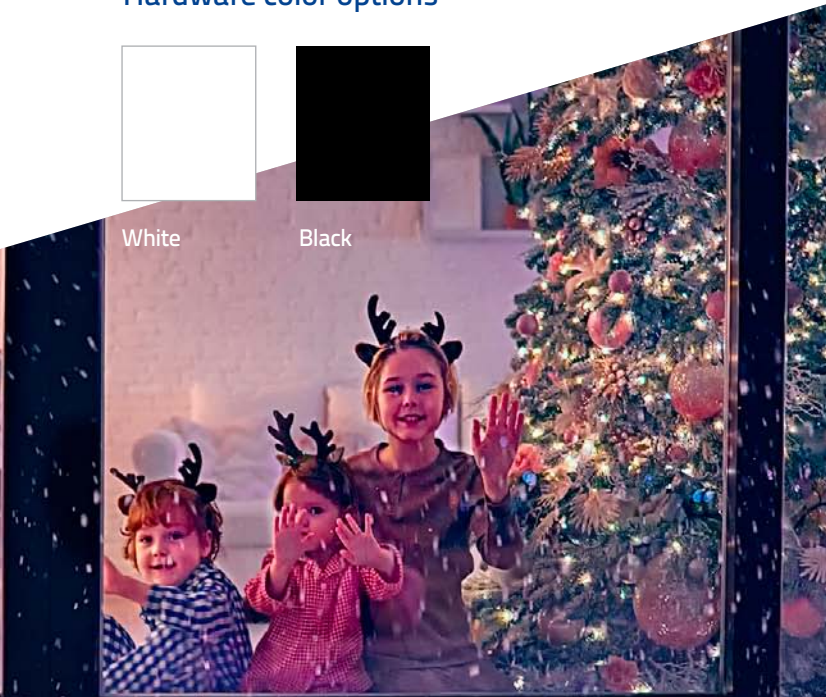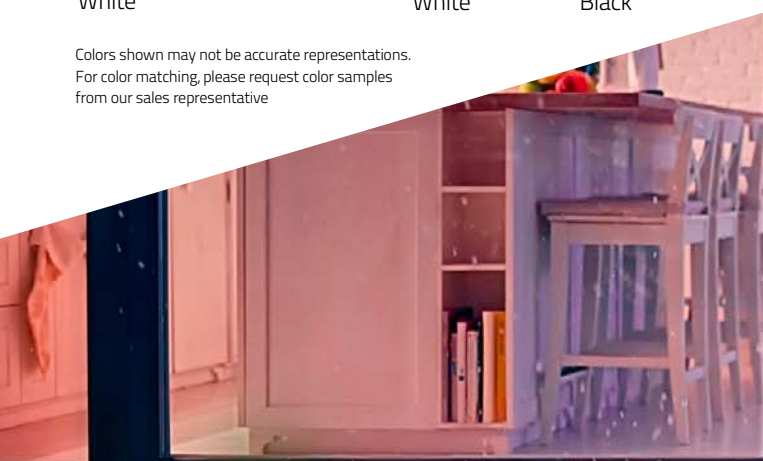


Additional profiles

4481




J-Channel is designed specifically for trimming out openings on your wall panels. Windows, doors, and louvers on the walls of your building blend in seamlessly when J-Channel is installed. J-Channel hides the cut lines of panels

4482




Frame 5/8" Flange
Profile installed on the exterior sides of a window

4483




Frame Flush Flange
Flush-flange window frames are appropriate for any kind of cladding that produces a flat surface. It gives a finished look to a window installation

4484

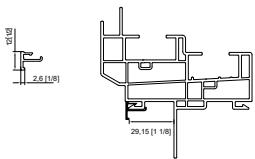


Stucco key is explicitly designed for new construction homes using stucco. Stucco key features help finish stucco around a window, providing a consistent finishing point. It covers the gap that can result from stucco's

4485




Brick mold gives a finished look to a window installation surrounded by brick.

4486




Mullion cap is designed for mulling two separate window frames together to create a large window.

4488



Head Cover. Also known as a head expander, it is used in replacement window applications where the replacement window is slightly shorter than the existing frame. The head expander can be insulated and covers the gap between the head of the window and the frame, making installation hassle-free.

4489



Jamb Extension.
Jamb extensions are installed along the interior edge of window and patio door frames, providing a smooth transition to the interior trim or casing



YOUR
WINDOWS
www.yourwindows.com