




**YOUR  
WINDOWS**  
www.yourwindows.com

# Trapez



**Your one-stop broker**  
for high-quality vinyl windows and doors

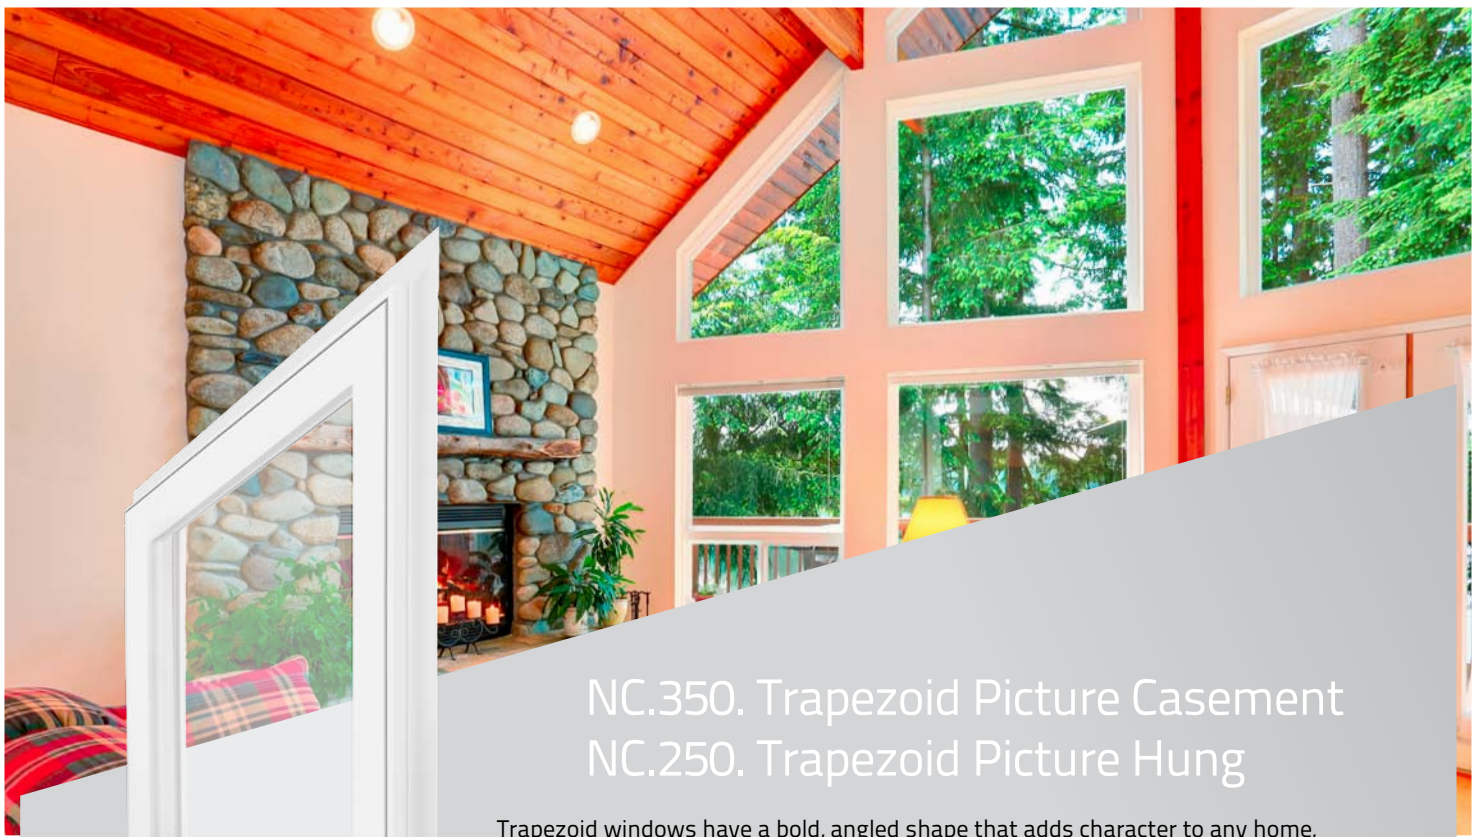

## NC.350. Trapezoid Picture Casement NC.250. Trapezoid Picture Hung

Trapezoid windows have a bold, angled shape that adds character to any home, modern or traditional. They're usually paired with other windows to create eye-catching designs and let in more light. Because they don't open, they insulate well and boost energy efficiency. Eye-catching on the outside, energy-smart on the inside.

### Main technical parameters of the System:


- Depth of frame: 3 1/4"
- Glazing thickness range: up to 3/4"
- Exterior glazed sash
- Integral accessory grooves
- Integral nailing fin for new-construction applications
- Available without integral nailing fin for replacement window applications



### Grill patterns



None




Colonial




## Types of glass:

GLAZING OPTIONS	Compare U-factors and SHGC values			Glazing proposals
	U-factor	SHGC	U-factor	
LOW-E	3/4" Low-E	0.29	SHGC 0.44	4mm XN - 12mm Arg90 - 4mm Clr
	One lite of Low-E with argon			
	3/4" Low-E ONE	0.29	SHGC 0.35	„4mm Planitherm One II - 12mm Arg90 - 4mmClr“
	One lite of Low-E ONE with argon			
DOUBLE LOW-E	3/4" Low-E double	0.28	SHGC 0.42	„4mm CG Prem2 UC4 - 12mm Arg90 - 4mmCG Prem2 UC4“
	Two lites of Low-E ONE with argon			
	3/4" Low-E ONE+	0.28	SHGC 0.30	4mm CG 1.0+ - 12mm Arg90 - 4mm CG 1.0+
	Two lites of Low-E ONE+ with argon			
SELECTIVE	3/4" Cool-lite SKN	0.28	SHGC 0.20	4mm CL SKN 154 - 12mm Arg90 - 4mm Clr
	One lite of solar cooling Low-E			
	3/4" SunGard70/35	0.29	SHGC 0.25	4mm SG SN 70/35 - 12mm Arg90 - 4mm Clr
	One lite of solar cooling Low-E			


LOW-E



DOUBLE LOW-E



SELECTIVE




## Trapezoid Picture Hung

Product Type	Series	Test Unit Size (inches)	Overall Rating	Air Infiltration (cfm/ft.)	Water Pressure (psf)	Structural Pressure (psf)	Primary Product Designator
Trapezoid picture window hung	NC.250	60 X 60	CW - PG50	0,01	9,82	+50/-50	A440-22
	RP.250	60 X 60	CW - PG50	0,01	9,82	+50/-50	A440-22

## Trapezoid Picture Casement

Product Type	Series	Test Unit Size (inches)	Overall Rating	Air Infiltration (cfm/ft.)	Water Pressure (psf)	Structural Pressure (psf)	Primary Product Designator
Trapezoid picture window Casement	NC.350	60 X 60	CW - PG30	0,01	9,82	+30/-30	A440-22
	RP.350	60 X 60	CW - PG40	0,01	9,82	+30/-30	A440-22



■ Northern ■ North-Central ■ South-Central ■ Southern


## Laminate colors




Mahogany



Walunt V



Golden Oak



Silver V



Brown 8972



Black



Anthracite Grey



Trompet C-32 N Smooth

## Color options



White



White



Black



White




Black

## Mosquito net colors


## Hardware color options

Colors shown may not be accurate representations. For color matching, please request color samples from our sales representative

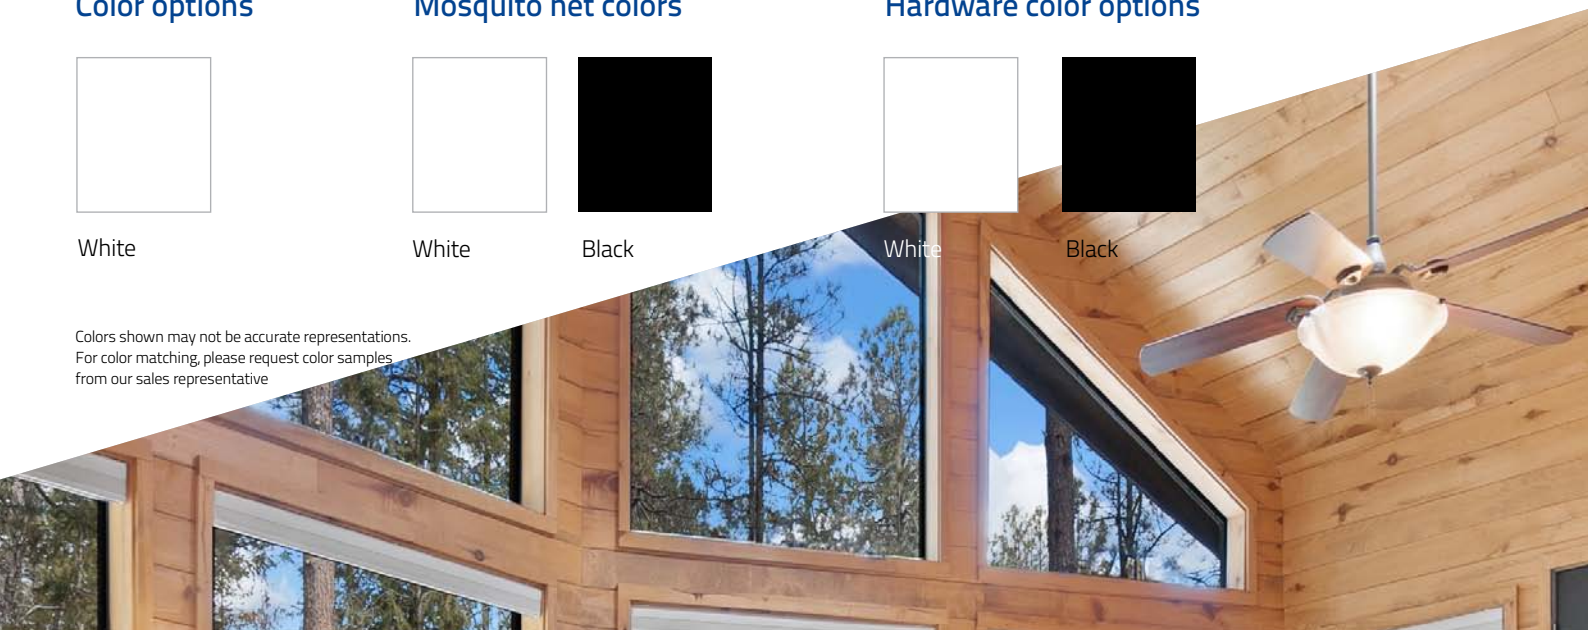


## Additional profiles

**4481**




J-Channel is designed specifically for trimming out openings on your wall panels. Windows, doors, and louvers on the walls of your building blend in seamlessly when J-Channel is installed. J-Channel hides the cut lines of panels

**4482**




Frame 5/8" Flange  
Profile installed on the exterior sides of a window

**4483**

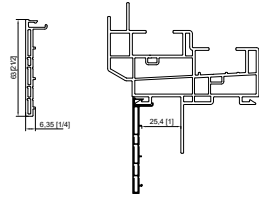


Frame Flush Flange  
Flush-flange window frames are appropriate for any kind of cladding that produces a flat surface. It gives a finished look to a window installation

**4484**

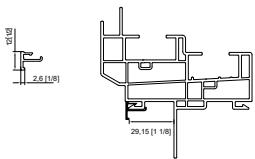


Stucco key is explicitly designed for new construction homes using stucco. Stucco key features help finish stucco around a window, providing a consistent finishing point. It covers the gap that can result from stucco's

**4485**

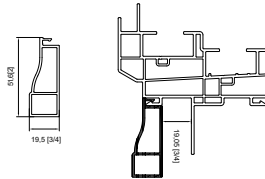


Brick mold gives a finished look to a window installation surrounded by brick.

**4486**




Mullion cap is designed for mulling two separate window frames together to create a large window.

**4488**



Head Cover. Also known as a head expander, it is used in replacement window applications where the replacement window is slightly shorter than the existing frame. The head expander can be insulated and covers the gap between the head of the window and the frame, making installation hassle-free.

**4489**



Jamb Extension.  
Jamb extensions are installed along the interior edge of window and patio door frames, providing a smooth transition to the interior trim or casing



**YOUR  
WINDOWS**  
www.yourwindows.com